

High quality for any heights

Tradition and knowledge - our key advantages.

We are proud to be a major European manufacturer of aluminium ladders and boxes with half a century (over 50 years) long tradition. During this time, we have developed a wide range of new products and expanded our production. Today we are strongly present in the most competitive European markets, as well as in Scandinavia, the Balkans, the Middle East and even in Japan.

Our excellent geographic location, in the heart of Europe, covers 17,000 m2 and has more than 7,500 m2 of covered area. It allows us optimum flexibility in meeting our customers' needs.

All our aluminum products comply with European standards, which are regularly monitored by authorized institutions of TÜV and SGS. Our brand ALPOS ALU and our products are widely recognized as synonym for QUALITY.




Household ladders ACCESS

Household step ladders ACCESS are inteded for household or industrial use. They are made of aluminium profile which makes them light, handy and durable; high-quality galvanizing or powder dyeing guarantees high degree of resistance against corrosion also for their steel components.

A wide range of ladders enables easier decision for users according to their individual needs and intended use, frequency of use and load level.

All load levels have been tested according to the standard selected in factory labarotory, in compliance with the European standards EN 131 and EN 14183 as certified by TÜF München Germany.

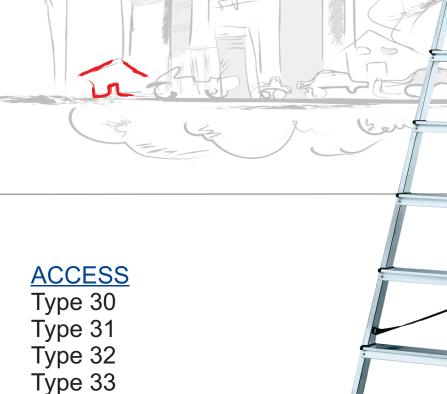



Type 20





□lp□5 alu





1. SAFETY RAIL

A high safety rail guarantees safe-lean climbing.



3. STEP

Non-slip steps with an 80 mm wide ribbed profile.



150 kg


2. TENSIONING BELT

Tension safeguard for greater safety.



4. Non-slip feet

Non-slip feet protects the ladder from slipping.

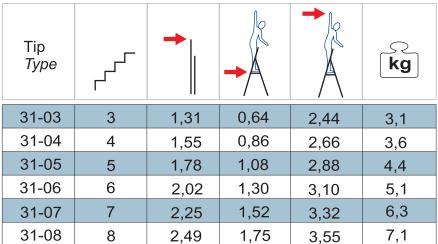





Norme Européenne






www.alpos.si Type 30 **Household ladders ACCESS** Intended for household use. max. 120 kg 1. SAFETY RAIL 2. Tensioning belt 3 A high safety rail Tension safeguard for guarantees safe-lean climbing. greater safety. 4 3. STEP 4. Non-slip feet Non-slip feet protects Non-slip steps with an 80 mm wide ribbed the ladder from slipping. profile.



| Tip <i>Type</i> | 7- | → | → | | kg |
|--------------------|----|----------|----------|------|-----|
| 30-03 | 3 | 1,31 | 0,64 | 2,44 | 2,7 |
| 30-04 | 4 | 1,55 | 0,86 | 2,66 | 3,2 |
| 30-05 | 5 | 1,78 | 1,08 | 2,88 | 3,7 |
| 30-06 | 6 | 2,02 | 1,30 | 3,10 | 4,5 |
| 30-07 | 7 | 2,25 | 1,52 | 3,32 | 5,3 |
| 30-08 | 8 | 2,49 | 1,75 | 3,55 | 5,9 |

□lp□s alu

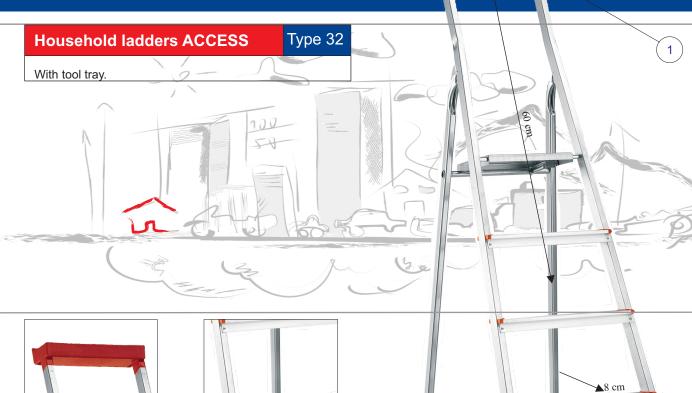

max. 150 kg

30 cm

1. TOOL TRAY

A practical tool tray made of compact PVC, solidly built in the aluminium profile.



3. Non-slip feet

Non-slip feet protects the ladder from slipping.




2. STEP

Non-slip steps with an 80mm wide ribbed profile.



4. TENSIONING BELT

Tension safeguard for greater safety.

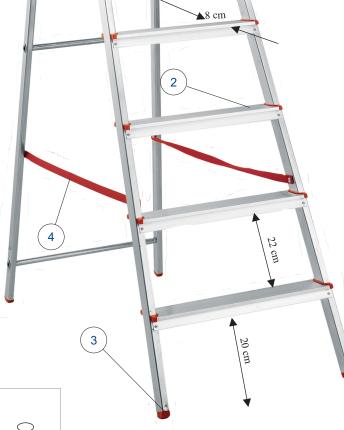


| Tip Type | 7- | • | → | | kg |
|-------------|----|------|----------|------|-----|
| 32-03 | 3 | 1,35 | 0,64 | 2,44 | 3,5 |
| 32-04 | 4 | 1,58 | 0,86 | 2,66 | 4,0 |
| 32-05 | 5 | 1,82 | 1,08 | 2,88 | 4,5 |
| 32-06 | 6 | 2,05 | 1,30 | 3,10 | 5,5 |
| 32-07 | 7 | 2,29 | 1,52 | 3,32 | 6,4 |
| 32-08 | 8 | 2.53 | 1,75 | 3.55 | 7.2 |







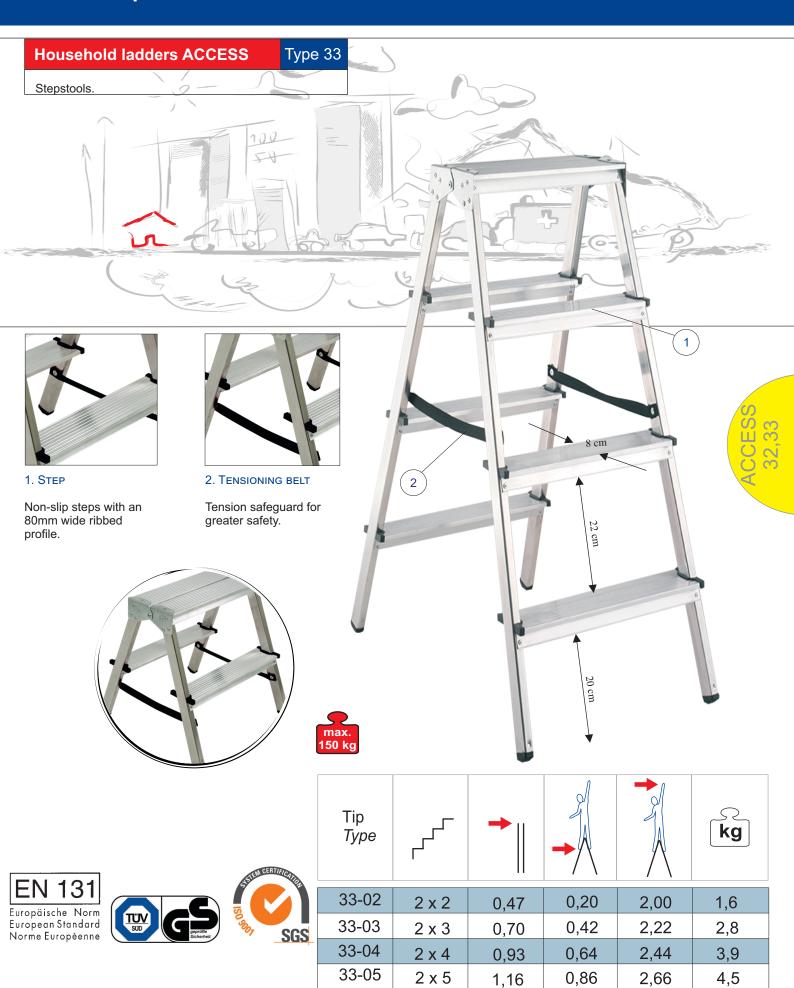

33-06

1,08


2,88

5,2

1,40

2 x 6


alu alu

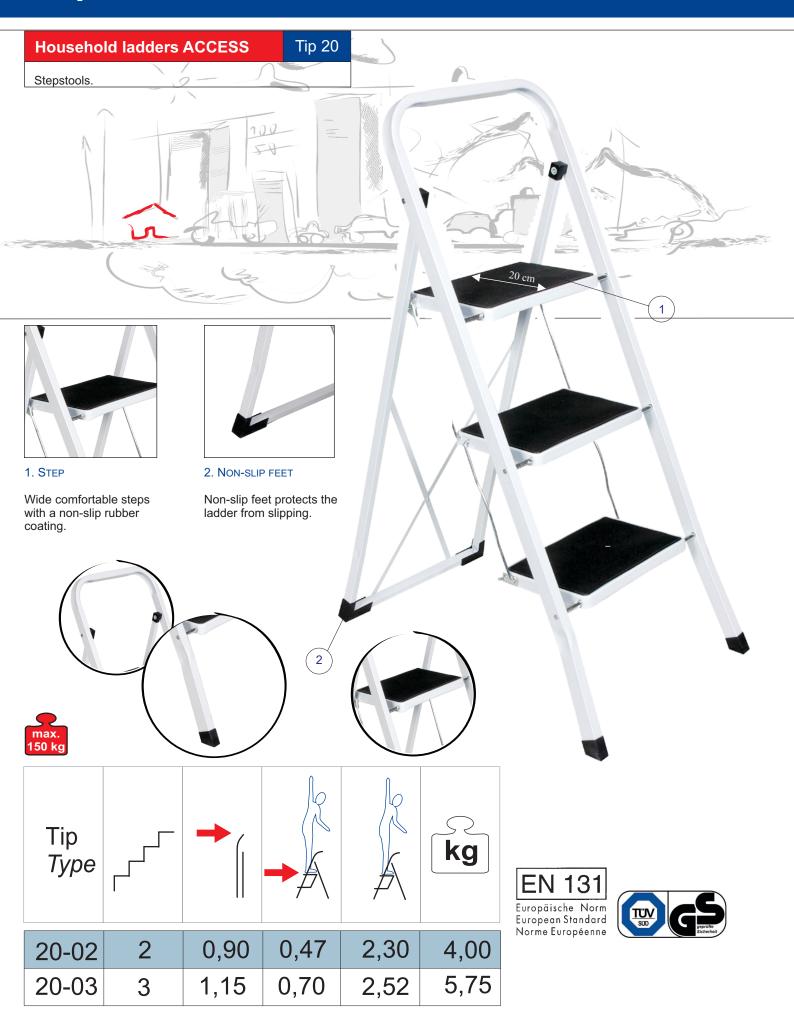


Tehnical ladders EXPERT

EXPERT ladders have been designed especially for those who need a robust and durable, as well as a very light and handy ladder. These characteristics are guaranteed by strong aluminium profiles with strengthened highest points. Consequently, the load capacities according to the European standard EN 131 are easily reached and exceeded, which are regularly certified by the TÜV München institution.

All components have been developed and manufactured with a clear vision to ensure the highest level of safety, reliability and durability. This makes ladders of the EXPERT class ideal for everyday heavy duty use and more demanding professional use.

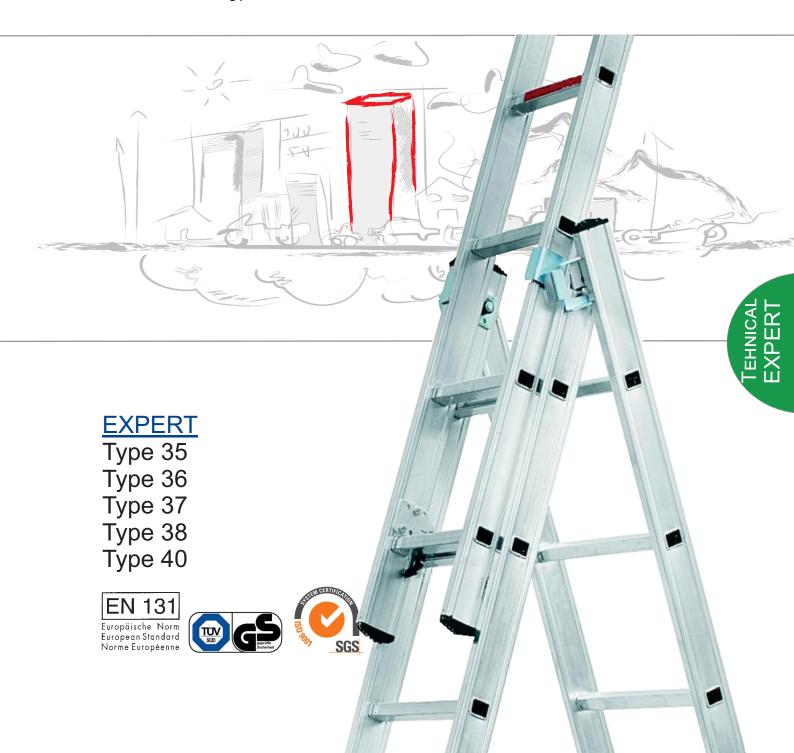

□lp□5 alu

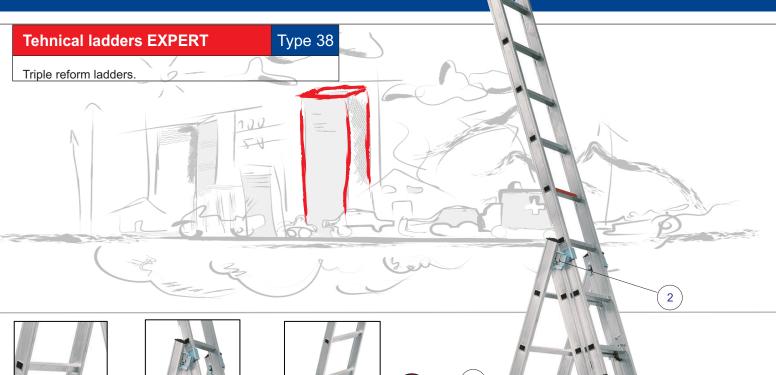

1. Rung

Wide ribbed rungs for safe climbing.



2. SLIDING MECHANISM

Made of quality galvanised steel for 100-percent safety.



A firmly fastened stabiliser bar prevents ladders from inclining even when working at the greatest heights.




4. FIXING THE RUNG ON THE PROFILE

Rung extension within the profile and orbital riveting guarantee strenght of all rungs.



5. FOOT

Non-slip feet made from quality rubber guarantee safety on all suitable surfaces.



6. CASTERS

For facilitated use for sizes exceeding 3 x 12 rungs.



| Tip Type | 7- | → | → | → | | | - | | kg |
|----------|-------|----------|----------|----------|-------|------|----------|------|------|
| 38-07 | 3 x 7 | 2,15 | 4,80 | 4,00 | 5,80 | 3,34 | 1,98 | 3,78 | 14,6 |
| 38-08 | 3 x 8 | 2,43 | 5,60 | 4,51 | 6,31 | 3,93 | 2,57 | 4,37 | 16,6 |
| 38-09 | 3 x 9 | 2,71 | 6,10 | 5,01 | 6,81 | 4,37 | 3,01 | 4,81 | 18,0 |
| 38-10 | 3 x10 | 2,99 | 6,41 | 5,32 | 7,12 | 4,74 | 3,38 | 5,18 | 19,9 |
| 38-11 | 3 x11 | 3,27 | 7,22 | 6,13 | 7,93 | 5,00 | 3,65 | 5,45 | 22,4 |
| 38-12 | 3 x12 | 3,55 | 8,30 | 7,21 | 9,01 | 5,81 | 4,45 | 6,25 | 27,8 |
| 38-13 | 3 x13 | 3,84 | 8,58 | 7,49 | 9,29 | 6,08 | 4,72 | 6,52 | 30,1 |
| 38-15 | 3 x15 | 4,40 | 10,20 | 9,11 | 10,91 | 7,03 | 5,72 | 7,52 | 39,3 |







1. FIXING THE RUNG ON THE PROFILE

Rung extension within the profile and orbital riveting guarantee strenght of all




3. Fоот




2. Rung

Wide ribbed rungs for safe climbing.





1



| Non-slip feet made from |
|--------------------------|
| quality rubber guarantee |
| safety on all suitable |
| surfaces. |
| |


| EN 131 |
|---------------------------------------|
| Europäische Norm European Standard |
| Norme Européenne |






| Tip <i>Type</i> | ل ^ر - | → | → | → | | kg |
|--------------------|------------------|----------|----------|----------|------|------|
| 35-08 | 8 | 2,53 | 2,45 | 1,36 | 3,16 | 4,4 |
| 35-09 | 9 | 2,82 | 2,72 | 1,63 | 3,43 | 4,9 |
| 35-10 | 10 | 3,09 | 2,99 | 1,90 | 3,70 | 5,4 |
| 35-11 | 11 | 3,38 | 3,26 | 2,17 | 3,97 | 5,8 |
| 35-12 | 12 | 3,65 | 3,53 | 2,44 | 4,24 | 6,5 |
| 35-13 | 13 | 3,94 | 3,80 | 2,71 | 4,51 | 7,0 |
| 35-15 | 15 | 4,50 | 4,34 | 3,25 | 5,05 | 8,2 |
| 35-17 | 17 | 5,06 | 4,88 | 3,79 | 5,59 | 9,2 |
| 35-19 | 19 | 5,62 | 5,42 | 4,33 | 6,63 | 10,2 |

□lp□5 alu

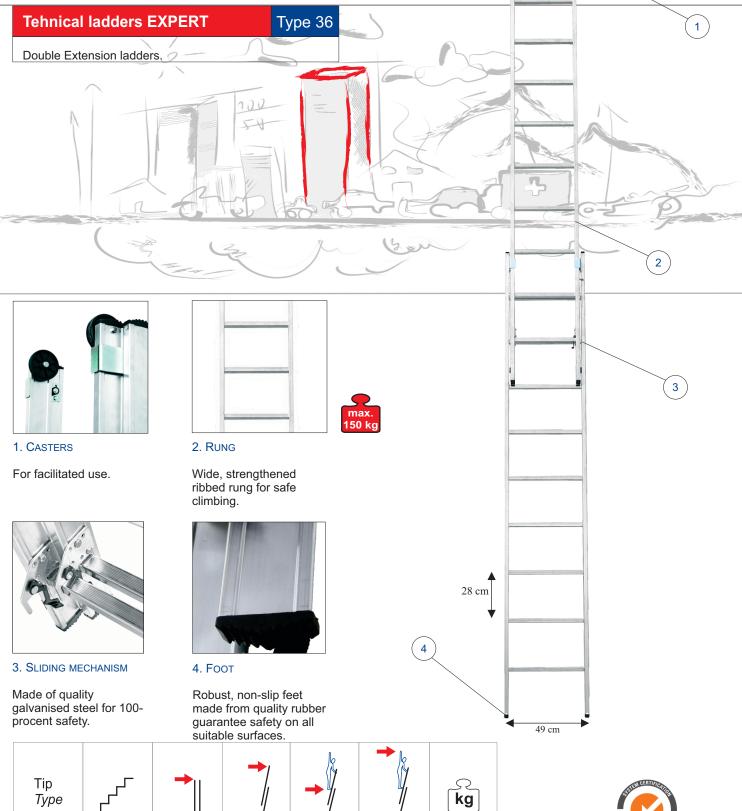

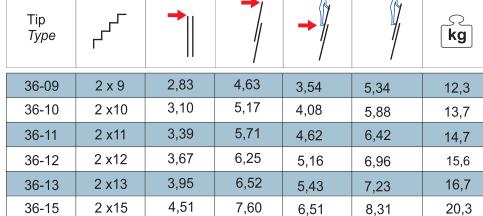







www.alpos.si Type 37 **Tehnical ladders EXPERT** Double extension rope operated ladder. 2 3 2. Rung 1. CASTERS Wide, strengthened For facilitated use. ribbed rung for safe climbing.



3. SLIDING MECHANISM

Made of quality galvanised steel for 100-procent safety.



4. PULLEY

For fast and comfortable positioning of the ladder.



5. **F**оот

Non-slip feet made from quality rubber guarantee safety on all suitable surfaces.









| Tip <i>Type</i> | | → | | → | | kg |
|--------------------|-------|----------|------|----------|-------|------|
| 37-12 | 2 x12 | 3,66 | 6,24 | 5,15 | 6,95 | 14,6 |
| 37-13 | 2 x13 | 3,95 | 6,52 | 5,43 | 7,23 | 16,8 |
| 37-15 | 2 x15 | 4,51 | 7,60 | 6,51 | 8,31 | 20,4 |
| 37-17 | 2 x17 | 5,07 | 8,69 | 7,60 | 9,40 | 25,6 |
| 37-19 | 2 x19 | 5,63 | 9,50 | 8,41 | 10,21 | 28,5 |



| Tip <i>Type</i> | ~~~ | → | - // | → | | \rightarrow | - | | kg |
|--------------------|-------|----------|-------------|----------|------|---------------|------|------|------|
| 40-06 | 2 x 6 | 1,90 | 2,90 | 2,10 | 3,40 | 1,70 | 0,66 | 2,46 | 8,3 |
| 40-07 | 2 x 7 | 2,10 | 3,40 | 2,60 | 3,90 | 2,00 | 0,92 | 2,72 | 9,7 |
| 40-08 | 2 x 8 | 2,42 | 3,96 | 2,87 | 4,67 | 2,27 | 1,18 | 2,98 | 11,2 |
| 40-09 | 2 x 9 | 2,70 | 4,50 | 3,41 | 5,21 | 2,51 | 1,45 | 3,25 | 12,5 |
| 40-10 | 2 x10 | 2,98 | 5,04 | 3,95 | 5,75 | 2,80 | 1,71 | 3,51 | 13,0 |
| 40-11 | 2 x11 | 3,26 | 5,58 | 4,49 | 6,29 | 3,06 | 1,97 | 3,77 | 15,8 |
| 40-12 | 2 x12 | 3,54 | 6,12 | 5,03 | 6,83 | 3,33 | 2,24 | 4,04 | 16,1 |
| 40-14 | 2 x14 | 4,10 | 6,94 | 5,85 | 7,65 | 3,85 | 2,76 | 4,56 | 19,5 |
| 40-16 | 2 x16 | 4,67 | 8,02 | 6,93 | 8,73 | 4,39 | 3,30 | 5,10 | 24,1 |









Tehnical ladders RATIO

The RATIO ladder range is intended for DIY enthusiasts and light proffessional use. A careful selection of aluminium profile dimensions guarantees convenience and optimal combination of quality and price. The certificate granted by the TÜV/ SGS demonstrates compliance with the EN 131 European standard and safety of both, the ladder as a whole and of all its components.

Plastic feet caps prevent sliding, wide square rungs enable safe climbing while the sliding mechanism made of quality galvanized steel on extension ladders guarantees safety even when working at high altitudes.

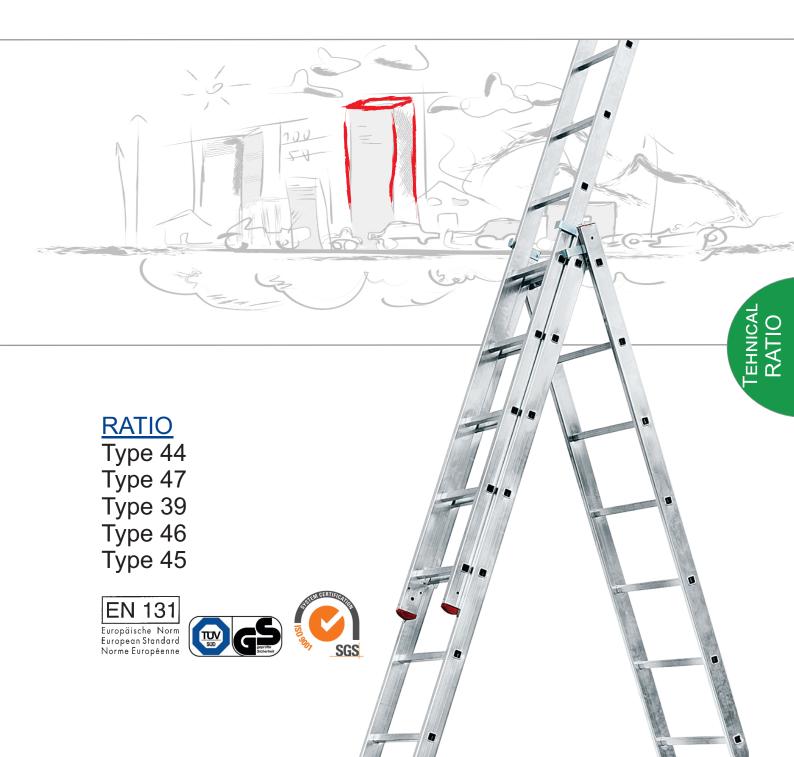

□|p□= alu

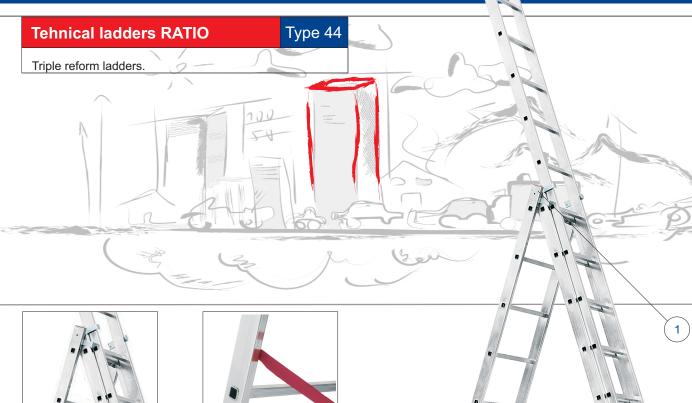

1. SLIDING MECHANISM

Made of quality galvanised steel for 100percent safety.



3. STABILISER BAR

A firmly fastened stabiliser bar prevents ladder from iclining even when working at the greatest heights.



2. TENSIONING BELT

Fixed on extension ladders is the ultimate safeguard against any potential accidents.



4. **F**оот

Robust, non-slip feet made from quality rubber quarantee safety on all suitable surfaces.



| Tip Type | 7- | → | → //////////////////////////////////// | → | | | → | | kg |
|-------------|-------|----------|---|----------|------|------|----------|------|------|
| 44-07 | 3 x 7 | 1,99 | 4,09 | 3,14 | 4,95 | 2,69 | 1,50 | 3,30 | 10,5 |
| 44-08 | 3 x 8 | 2,28 | 4,90 | 3,95 | 5,75 | 3,48 | 2,29 | 4,59 | 12,5 |
| 44-09 | 3 x 9 | 2,56 | 5,71 | 4,76 | 6,55 | 4,03 | 2,84 | 4,65 | 13,7 |
| 44-10 | 3 x10 | 2,84 | 5,98 | 5,03 | 6,85 | 4,30 | 3,11 | 4,90 | 15,0 |
| 44-11 | 3 x11 | 3,12 | 6,52 | 5,57 | 7,35 | 4,53 | 3,34 | 5,15 | 17,1 |

















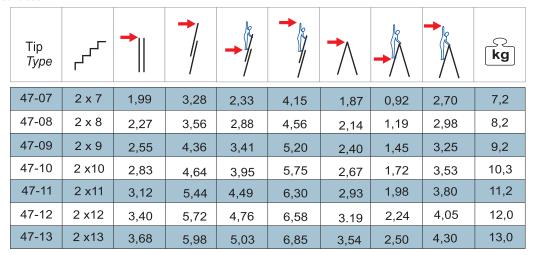

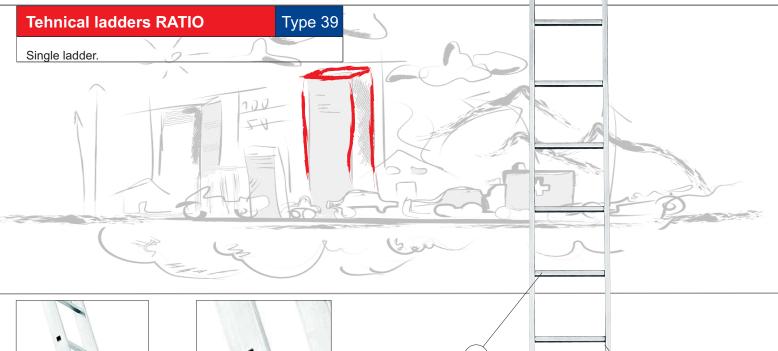

1. Rung

Wide, strengthened ribbed rung for safe climbing.



3. **F**оот

39-20

Non-slip feet made from quality rubber guarantee safety on all suitable surfaces



2. FIXING THE RUNG ON THE PROFILE

Rung extension within the profile and orbital riveting guarantee strenght of all rungs.



| surfaces. | | | | | | | _ |
|-------------|-----------|----------|------|----------|------|-----|-----|
| Tip Type | لمر. ا | → | • | → | | kg | |
| 39-07 | 7 | 1,99 | 1,91 | 0,96 | 2,77 | 2,9 | |
| 39-08 | 8 | 2,27 | 2,19 | 1,24 | 3,05 | 3,3 | ŀ |
| 39-09 | 9 | 2,55 | 2,46 | 1,51 | 3,32 | 3,6 | |
| 39-10 | 10 | 2,83 | 2,74 | 1,79 | 3,60 | 3,7 |] |
| 39-11 | 11 | 3,11 | 3,00 | 2,05 | 3,87 | 4,5 | l |
| 39-12 | 12 | 3,39 | 3,28 | 2,33 | 4,15 | 4,9 |] 1 |
| 39-13 | 13 | 3,67 | 3,54 | 2,59 | 4,40 | 5,3 | |
| 39-14 | 14 | 3,95 | 3,82 | 2,87 | 4,65 | 5,6 | |
| 39-17 | 17 | 4.80 | 4 63 | 3.68 | E E0 | 7.0 | |

5,44


4,49

6,30

9,7

5,64

20

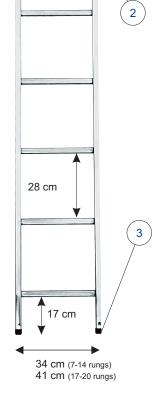

EN 131

Europäische Norm European Standard Norme Européenne






| EN 131 |
|---|
| Europäische Norm European Standard Norme Européenne |







| Tip <i>Type</i> | 7- | → | | → | | kg |
|--------------------|-------|----------|------|----------|------|------|
| 46-07 | 2 x 7 | 1,99 | 3,28 | 2,33 | 4,15 | 6,7 |
| 46-08 | 2 x 8 | 2,27 | 3,56 | 2,61 | 4,68 | 7,5 |
| 46-09 | 2 x 9 | 2,55 | 4,36 | 3,41 | 5,20 | 8,4 |
| 46-10 | 2 x10 | 2,83 | 4,88 | 3,69 | 5,75 | 9,4 |
| 46-11 | 2 x11 | 3,12 | 5,44 | 4,49 | 6,30 | 10,5 |
| 46-12 | 2 x12 | 3,40 | 5,72 | 4,77 | 6,58 | 11,3 |
| 46-13 | 2 x13 | 3 68 | 5 98 | 5.03 | 6.85 | 12.3 |

проs alu

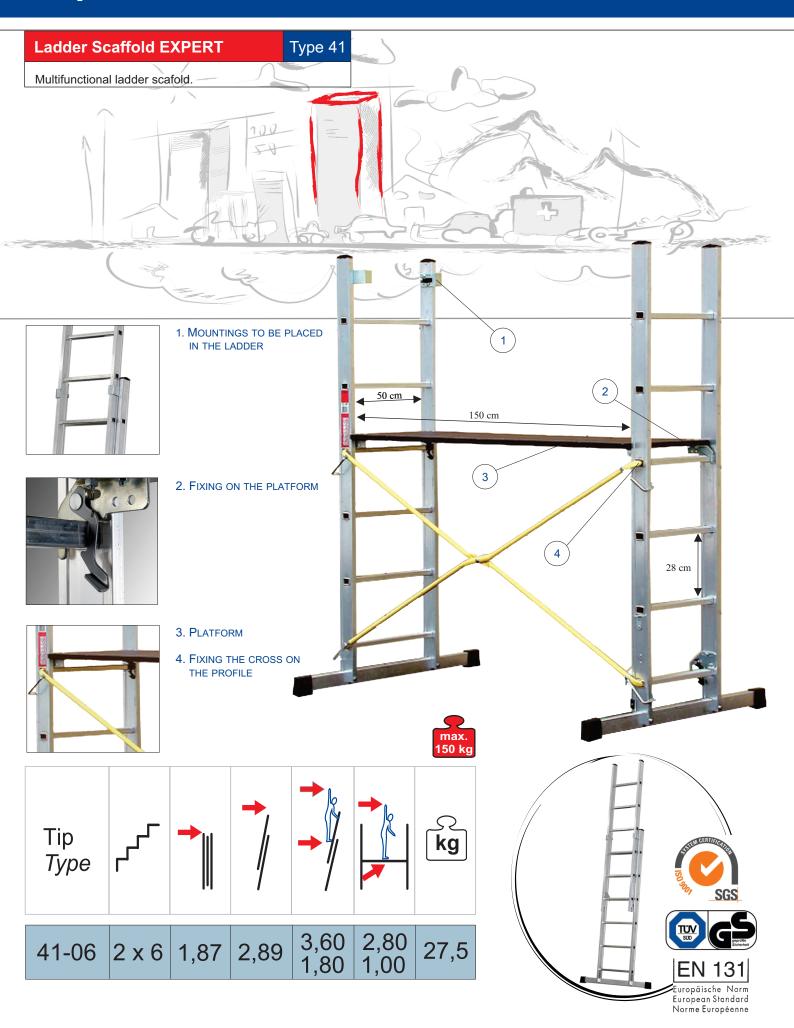

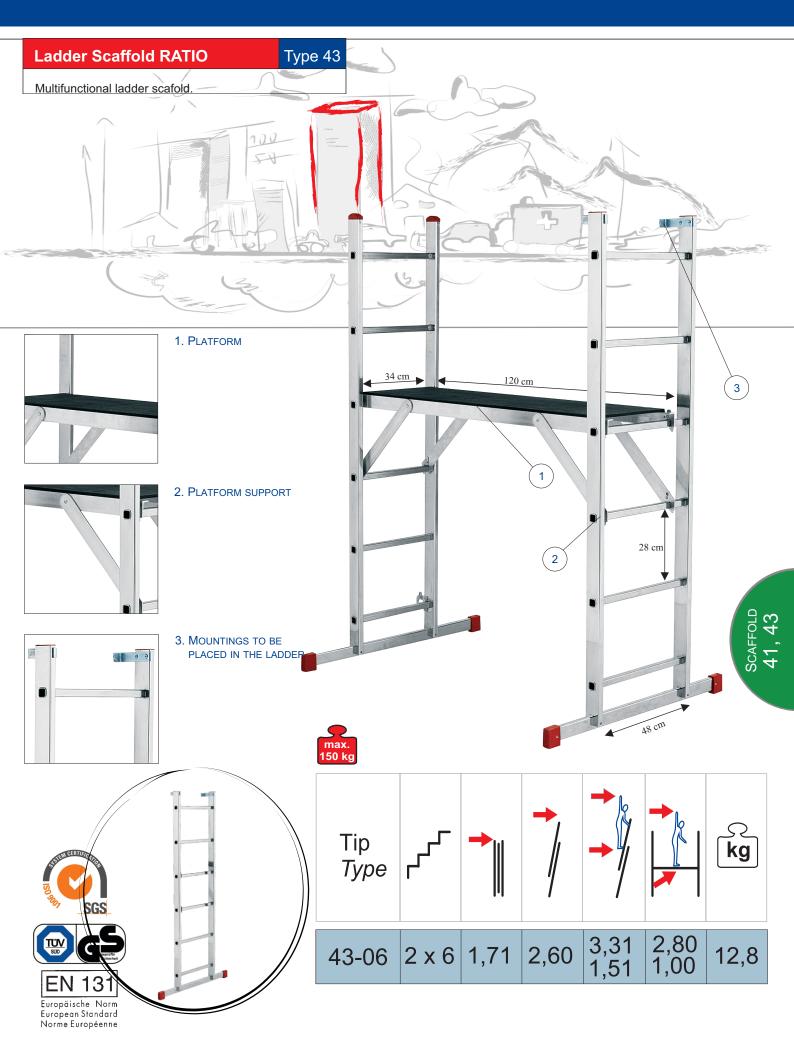

□lp□5 alu

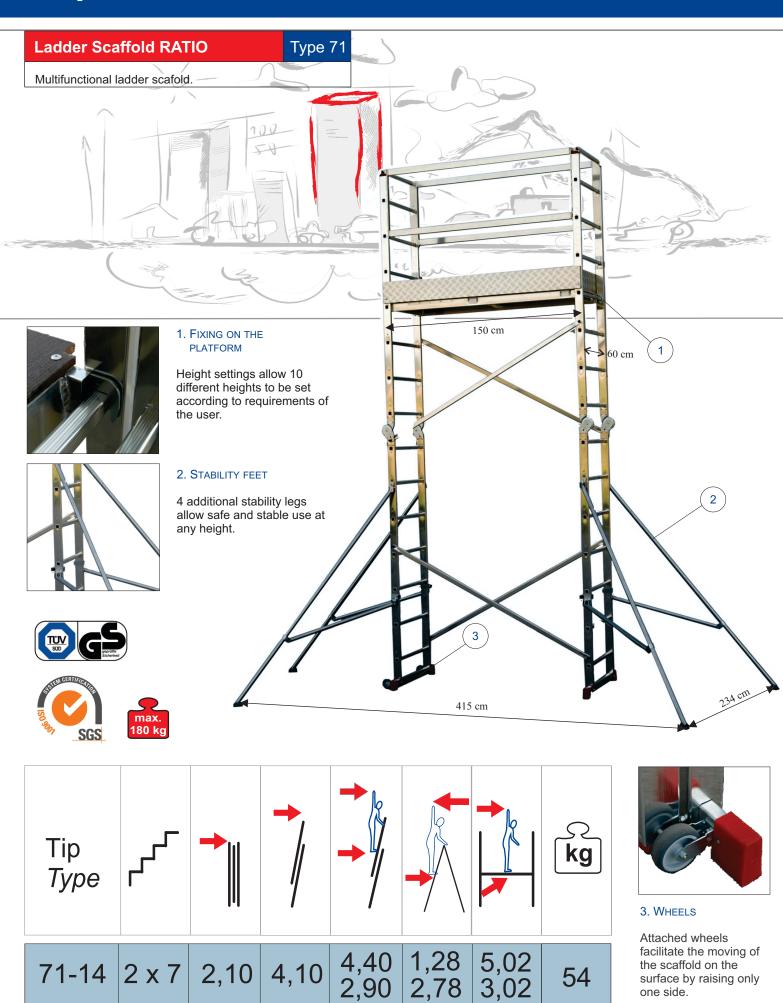

one side.



Aluminium boxes

Flexible and secure boxes for carrying and storing equipment.

You can choose between eight series presented on the following pages. They have been developed on the basis of experience, research and modern processing technology. Therefore, they are light and elegant, yet robust. In our program you can find all the usual sizes and different versions for professional and personal use.

Alpos Alu boxes effectively simplify transport and facilitate the transfer. You safely store things you care about most.

Resistant against corrosion, weather conditions and temperatures.












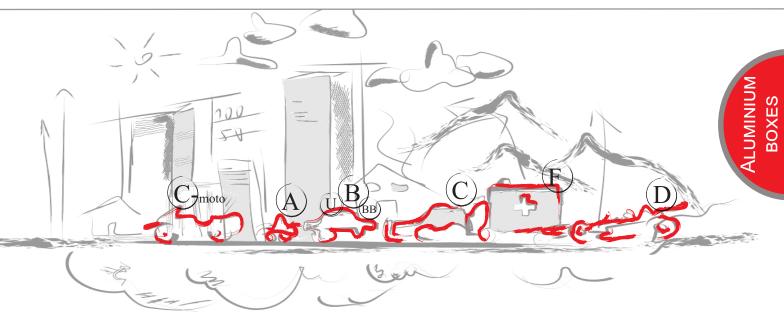

Boxes with corners.



Intended for professional and home use.

These are robust transportation boxes made of **1 mm** thick aluminium sheets, equipped with durable stacking corner pieces. They are superior in safety and in economically efficient use of space. Types D163 and D415 have the bottom and the cover additionally reinforced with reinforced aluminium rods.

- For temperatures between -40 °C and +180 °C
- Resistant against corrosion, weather conditions and temperatures
- Four stacking corner pieces made of nylon/polyester,
- Safety spring handles with synthetic coating
- Protection against hinge damage
- Protection against external influences such as dust and water





Adjustable compartment set

It consists of four aluminum partitions and four retaining strips. For boxes **D47** and **D 91**.



Auxiliary wheels

Suitable for boxes of all sizes.




Cylinder lock

The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.



Trolley on wheels

Suitable for boxes **D 29**, **D 47**, **D 76** and **D 91**

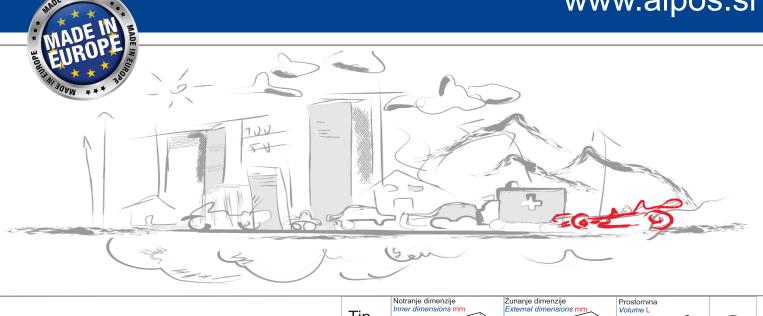






D 140

| Type | DxšxV LxWxH | DxŠxV LxWxH | | kg |
|-------|----------------|----------------|-------|------|
| D 29 | 400x300x245 | 432x335x277 | 29L | 3,3 |
| D 47 | 550x350x245 | 582x385x275 | 47 L | 4,6 |
| D 76 | 550x350x380 | 582x385x410 | 76 L | 5,3 |
| D 91 | 750x350x350 | 782x385x380 | 91 L | 6,2 |
| D 140 | 870x460x350 | 902x495x380 | 140 L | 8,7 |
| D 157 | 750x550x380 | 782x585x410 | 157 L | 9,0 |
| D 163 | 1150x350x380 | 1182x385x410 | 163 L | 10,5 |
| D 240 | 750x550x590 | 782x585x620 | 240 L | 10,7 |
| D 400 | 1500x550x485 | 1532x585x515 | 400 L | 20,0 |
| D 415 | 1160x755x485 | 1192x790x515 | 415 L | 17,0 |
| D 455 | 2100x450x485 | 2132x485x515 | 455 L | 15,0 |



D 157

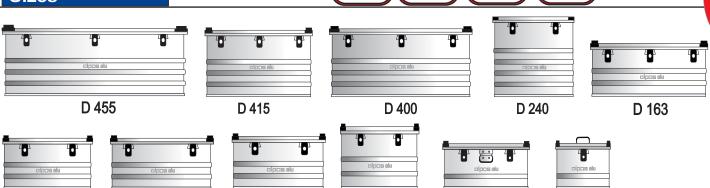

D 76

D 47

D 29

D 91

Pharmaceutical boxes.

F

Designed for use in pharmacy.

Made of **1.5 mm** thick aluminium sheet. Ideal for storage and transport of extremely delicate contents or substances.

- Bottom and cover reinforcements
- For temperatures between -40 °C and +180 °C
- Resistant against corrosion, weather conditions and temperatures

- For highly delicate contents, i.e. pharmaceutical use

Safety spring handles with synthetic coatingWhite interior belts and corner pieces

- Protection against external influences

- Additionally reinforced hinges throughout the length of the cover

INTERIOR BELTS

White interior belts for safe opening of the lid.



Optional extras



Adjustable compartment set

It consists of four aluminum partitions and four retaining strips. For box **F47**.



Cylinder lock


The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.

of boxes.

with fiberglass facilitate folding





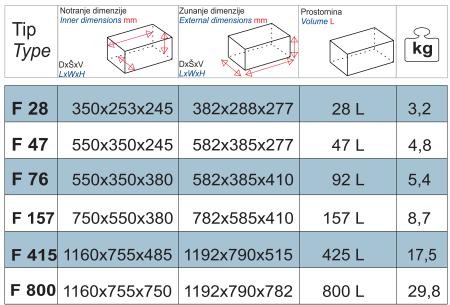











Sizes













F 800 F 415 F 157

F 76

F 47

F 28


Reinforced transport boxes.

C

Intended for professional and home use.

Firm boxes made of **1 mm** thick aluminium sheets. Due to strong profiles, they offer safe storage and protection for delicate contents such as glass, delicate tools, photographic and electronic equipment. They are ideal for professional and industrial use.

- For highly delicate contents
- Resistant against corrosion, weather conditions and temperatures
- Low weight
- Safety spring handles with synthetic coating
- Protection against hinge damage
- Protection against external influences such as dust and water

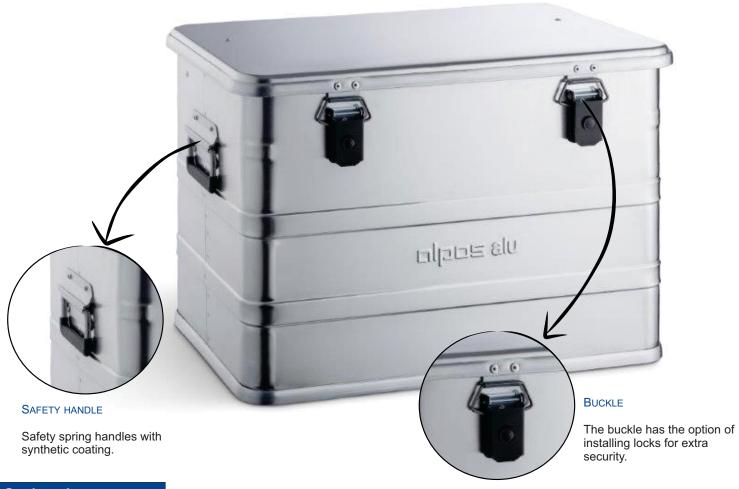

Optional extras



Adjustable compartment set

It consists of four aluminum partitions and four retaining strips. For boxes **C47** and **C91**.



Auxiliary wheels

Suitable for boxes of all sizes.



Cylinder lock

The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.



Trolley on wheels

Suitable for boxes C29, C47, C76 and C91.

Prostornina


59 L

92 L

10,5





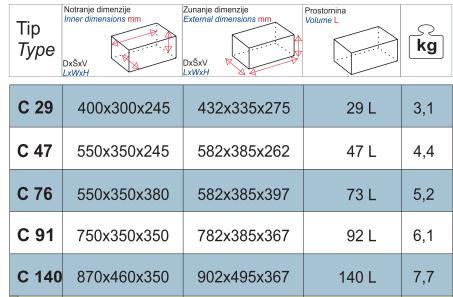



S C 59 T C 91

C 91



658x280x318

750x350x350





690x315x335

782x385x367

Sizes













C 91 C 29 C SET C 140 C 76 C 47

Motorcycle boxes.

C-moto

Intended for use on motorcycles.

Boxes are manufactured and designed for motorcycles. Boxes type C32, C36 and C41 are symmetric and can be attached on both, left and right, sides of the motorcycle. Type C35 is attached on the back part of the motorcycle. Boxes are robust, solid and are made of **1.2 mm** thick aluminum sheet. Strong profiles provide protection, storage and stability for all the supplies for a motorcyclist on road trips or "off-road".

- Silicone coated internal joints (waterproof)
- Protection against external influences such as dust or water
- Firm and fixed cover opening upwards
- Safety spring handles with synthetic coating located on the top of the cover
- Resistant against corrosion, weather and temperature
- Design of the latch allows installation of locks to ensure the safety of the contents (optional)
- Low weight



Optional extras




Cylinder lock

The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.









| C 32 | 455x205x350 | 490x240x367 | 32 L | 3,0 |
|------|-------------|-------------|------|-----|
| C 36 | 455x235x350 | 490x270x367 | 36 L | 3,2 |
| C 41 | 455x265x350 | 490x300x367 | 41 L | 3,4 |
| C 35 | 400x297x293 | 430x335x326 | 35 L | 3,2 |











Sizes



cipos alu





C 35-back

C 32-side C 36-side C 41-side

□|p□= alu

Transport boxes.

В

Intended for professional and home use.

Presents standard boxes made of **0.8 mm** thick aluminium sheets. In spite of their low weight they are remarkably stable due to special profile and curved edges. They are suitable for all kinds of transport and storage.

- Stable and light
- Resistant against corrosion, weather conditions and temperatures
- Safety spring handles with synthetic coating
- Protection against hinge damage
- Protection against external influences such as dust and water



Optional extras



Adjustable compartment set

It consists of four aluminum partitions and four retaining strips. For boxes **B47** and **B90**.



Cylinder lock

The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.



Trolley on wheels

Suitable for boxes **B29**, **B47**, **B76** and **B90**.





| Tip Type | Notranje dimenzije Inner dimensions mm DxŠxV LxWxH | Zunanje dimenzije External dimensions mm DxŠxV LxWxH | Prostornina Volume L | kg |
|-------------|---|---|-------------------------|-----|
| B 29 | 400x300x245 | 430x330x275 | 29 L | 2,9 |
| B 47 | 550x350x245 | 580x380x275 | 47 L | 3,7 |
| B 70 | 565x360x350 | 595x390x380 | 71 L | 4,4 |
| B 90 | 750x350x350 | 780x380x380 | 92 L | 5,1 |
| B 140 | 870x460x350 | 900x490x380 | 140 L | 7,7 |
| B 184 | 760x530x475 | 790x560x487 | 184 L | 8,5 |









Sizes













B 184

B 140

B 90

B 70

B 47

B 29

3


Office boxes.

BB

For storing binders and folders.

Firm office boxes made of **0.8 mm** thick aluminium sheets intended for file and folder storage. Special struts enable clear and simple storage. In addition, the files and folders can be transported together. The removable cover enables quick and easy access, and elegant stationary use. Ideal for storing and transporting important documents during fieldwork, at fairs and elsewhere.

- With struts for storing hanging binding folders
- Resistant against corrosion, weather conditions and temperatures
- Safety spring handles with synthetic coating
- Protection against hinge damage
- Protection against external influences such as dust and water
- Stores up to 8 (or 4) 75 mm thick filing folders or 12 (or 6) 50 mm thick filing folders
- Removable cover for quick and easy access to your documents when in stationary use

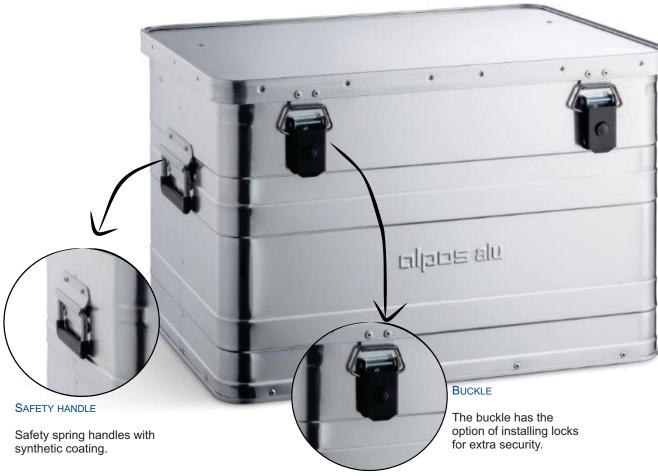

Optional extras



Cylinder lock

The design of the buckle allows the installation of locks to ensure the safety of the contents in the boxes.









| BB 50 | 400x400x290 | 440x440x320 | 46 L | 3,7 |
|-------|-------------|-------------|------|-----|
| BB 72 | 600x400x290 | 640x440x320 | 70 L | 4,6 |















Sizes





4-7 nipos alu

BB 50

Boxes without lid.



Transport boxes.

Firm transportation boxes made of **0.8 mm** thick aluminium sheets. Due to special refinement processes they are ideal for storing and transporting of foods and also everything else. Strong profiles and gutters along the periphery, provide stability and longevity. Large handles facilitate easy use.

- Appropriate for food industry
- Stable and longeval
- Resistant against corrosion, weather conditions and temperatures
- Low weight
- Large and comfortable handles
- Six different sizes in accordance with Euro palette standards



Optional extras



Trolley on wheels

Suitable for boxes **U28**, **U40**, **U56** and **U80**






ر kg









| U 28 | 350x253x240 | 385x288x260 | 21 L | 1,7 |
|-------|-------------|-------------|-------|-----|
| U 40 | 350x253x350 | 385x288x370 | 31 L | 2,0 |
| U 56 | 550x350x240 | 582x385x260 | 46 L | 2,8 |
| U 80 | 550x350x350 | 585x385x370 | 67 L | 3,0 |
| U 113 | 743x550x240 | 778x585x260 | 98 L | 4,6 |
| U 113 | 743x550x350 | 778x585x360 | 143 L | 5,2 |










Sizes

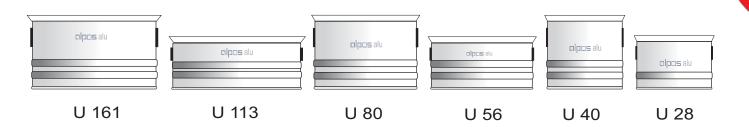

□|p□= alu

Light transport boxes.

Ideal for travel, relocation and storage.

Made of **0.8 mm** thick aluminium sheets and special profiles. The boxes are light and appropriate for all kinds of transport and storage. Four different sizes (A58 to A160) enable the boxes to be simply stored inside one another and are available as a set, sizes A40 and A81 are available as individual boxes.

- Resistant against corrosion, weather conditions and temperatures
- -6 sizes
- Low weight
- Can be stored inside one another
- Safety spring handles with synthetic coating
- Protection against hinge damage
- Protection against external influences such as dust and water






of the contents in the boxes.









| Δ | 40 | 535x335x220 | 566x370x237 | 39 L | 2,7 |
|---|-------|-------------|-------------|-------|-----|
| Δ | 81 | 750x353x300 | 785x388x317 | 79 L | 4,4 |
| | A 58 | 547x360x300 | 580x395x317 | 59 L | 3,1 |
| S | A 86 | 616x424x328 | 653x459x345 | 86 L | 3,7 |
| T | A 118 | 680x482x367 | 711x517x384 | 120 L | 4,6 |
| | A 160 | 750x550x385 | 785x585x402 | 159 L | 5,1 |









Sizes







A SET A 81 A 40



